


# Data sheet

## Contec.flex T / S / B

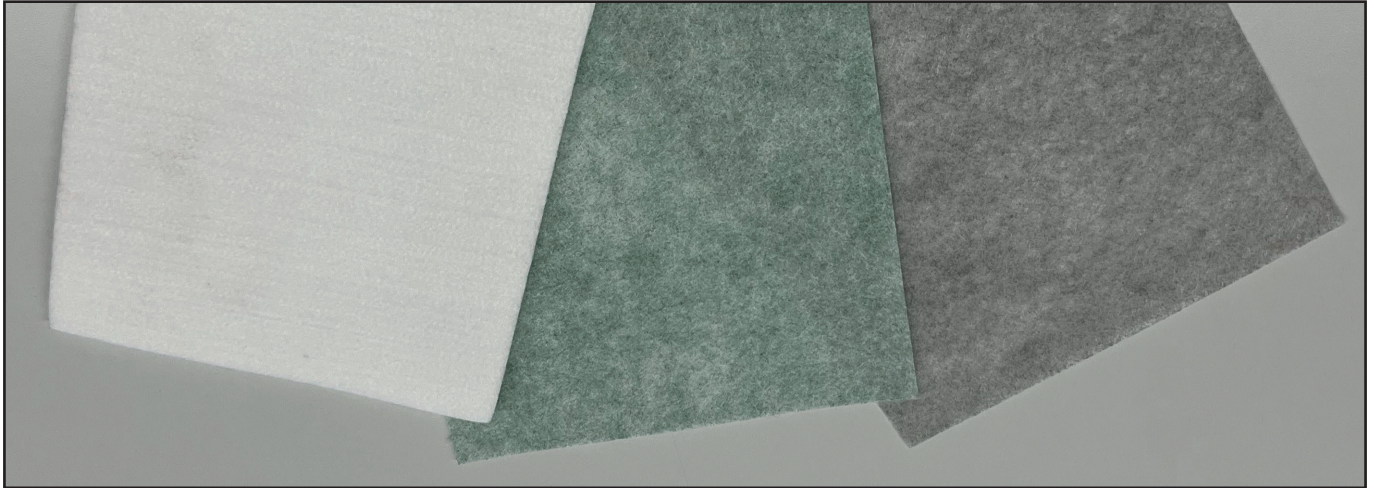

### Technical data

	Contec.flex T	Contec.flex S	Contec.flex B
<b>Colors</b>	Gray-mottled	Green-mottled	White
<b>Basis weight in kg/m<sup>2</sup></b>	140	200	800
<b>Thickness in mm</b>	1.0	1.2	6.0
<b>Penetration force in kN</b>	> 0.8	> 2	> 3.0
<b>Tensile strength</b>			
<b>min. tear force in kN/m</b>			
<b>Longitudinal</b>	> 3.0	> 15	> 24
<b>Across</b>	> 8.6	> 15	> 45
<b>min. tear elongation in %</b>			
<b>Longitudinal</b>	> 70	> 50	> 100
<b>Across</b>	> 50	> 50	> 80
<b>Dielectric strength</b>			
<b>cone drop test in mm</b>	< 36	> 24	1
<b>Delivery form (rolls)</b>			
<b>Standard width in cm</b>	200	200	200
<b>Special width in cm</b>	-	-	-
<b>Length in m</b>	100	100	25

