
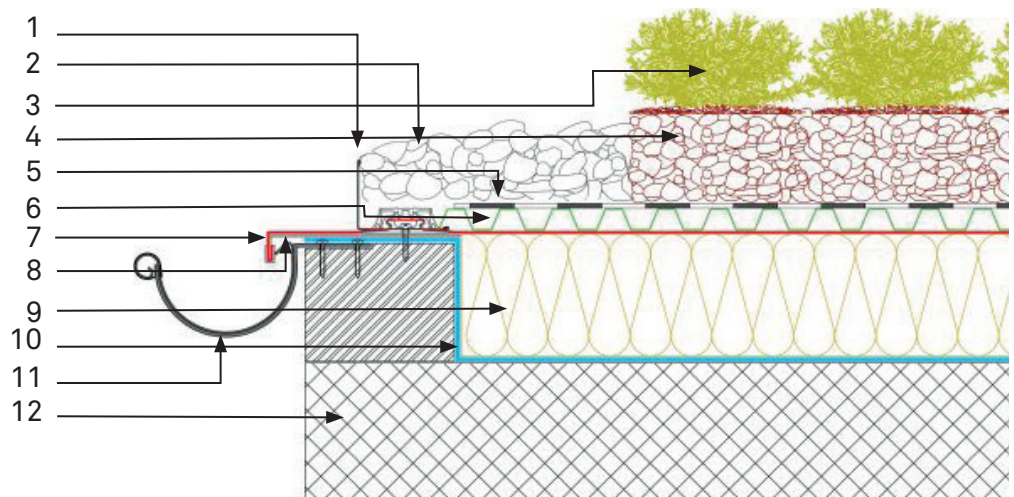


1.6 Detail solution

Roof edge termination to outer gutter (clamped)

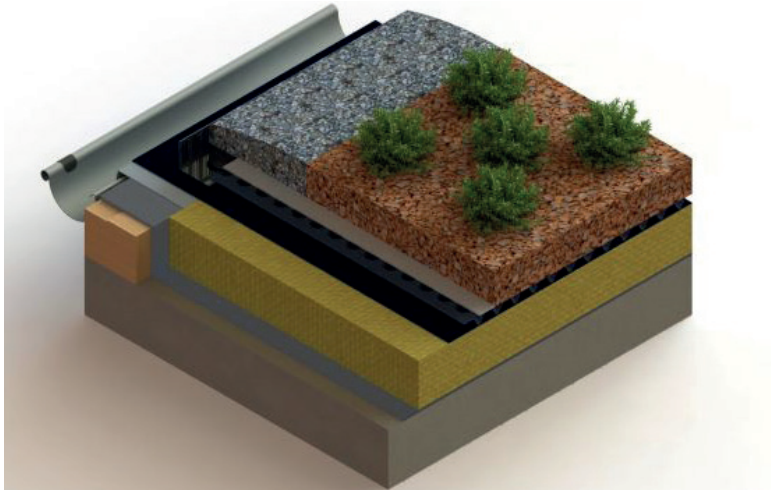

Legend

1. Contec.fix clamp holder with gravel rail
2. Round gravel washed, 16/32mm, width min. 30cm
3. Contec.fior seeding
4. Contec.fior RCE roof substrate
5. Contec.flex separating layer
6. Contec.drain water storage / Contec.drain drainage plate
7. Contec.proof EPDM, glued to inlet sheet and clamped with U-profile g
8. Inlet plate
9. Contec.therm thermal insulation
10. Contec.vap vapor retarder
11. Gutter
12. Substructure

